


PRODUCT DATA SHEET

PRODUCT: EASTTO MARINE T OIL

GRADES: 32, 68, 76

INTRODUCTION: These oils are blended from highly refined base stocks and antioxidant, rust inhibitor and antifoam additives. They have excellent thermal stability and demulsibility properties.

APPLICATION: Recommended for lubrication of marine turbines. It can be also used in Circulating systems, Anti-friction bearings, enclosed gears and Hydraulic units.

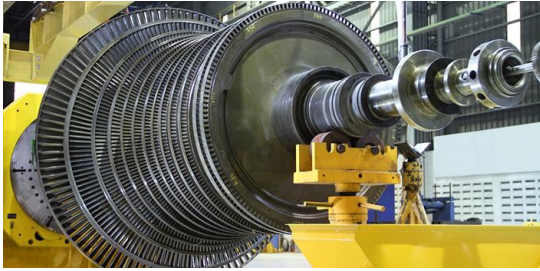

Used for lubrication of turbines

TYPICAL PROPERTIES:

EASTTO MARINE T OILS			
CHARACTERISTICS	32	68	76
Kinematic Viscosity @ 40°C, cst	32	68	76
Viscosity Index	95	95	95
Flash Point (COC) °C	200	210	220
Rust Test	Pass	Pass	Pass
Water Separation Test	Pass	Pass	Pass
Pour Point, °C	-15	-15	-15

PACKING: 210 Litres Drum

Date of issue : 01.09.2009

Date of revision: 09.08.2016

These Characteristics are typical of current production while future production will confirm to **EASTERN PETROLEUM PVT. LTD.** Specification variation in these characteristics may occur.

