

Eastto Conkut CX

INTRODUCTION: EASTTO CONKUT CX is versatile high Performance Emulsifier contains non phenolic biocide for soluble Cutting Oil. This is general Purpose Emulsifier which is soluble in Lubricating Base Stock and approximately 18-20 % Emulsifier is mixed in suitable oil as per application needs; however for best performance it can be used with naphthenic oil which would give better emulsion for longer duration. This product provides excellent corrosion protection for Cast iron metals.

APPLICATION: Recommended for Variety of Machining Operations for Ferrous and Non Ferrous Metals.

Following are the advantage for Soluble Cutting Oil made out of above EASTOCONKUT.


- Good Cooling and Lubricating Properties.
- Good Thermal Stability.
- No Foaming.
- Corrosion protection
- Long Emulsion Life. Can with stand 500 ppm hard water.
- None Staining.
- Possessing Antibacterial Property.
- Non Harmful to Operator.
- Tool Life is extended.
- Better surface finishing

PERFORMANCE LEVEL: Soluble cutting oil with EASTTO CONKUT CX emulsifier meets IS 1115-1986 (Reaffirmed 2002) specification.

TYPICAL PROPERTIES

CHARACTERISTICS	EASTTO CONKUT CX
Specific Gravity	1.03
K. Viscosity at 100° c, cSt	30
Emulsion Test in 500 ppm of Hard water	Passes
Cast Iron Test	Passes
PH of 5% Emulsion in distilled water	9.3

PACKING: 210 Litres Drums

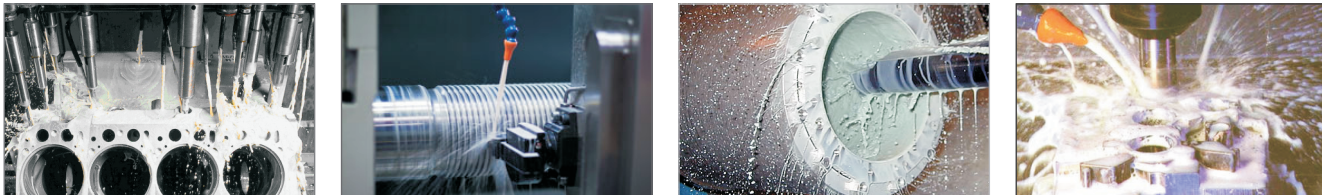

Eastern Petroleum Private Limited

Regd. Off.:

Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990
Email: office@easternpetroleum.in, office@eastto.in,
Web: www.easternpetroleum.in, www.eastto.in



Eastern Petroleum Private Limited

an ISO 9001-2008 certified company



**Eastto
Conkut CX**

Eastto Konkut EX

INTRODUCTION: EASTERN PETROLEUM PRIVATE LIMITED Brings a Versatile High Performance Emulsifier for soluble Cutting Oil. This is general Purpose Emulsifier Which is soluble in Lubricating Base Stock. Approximately 18-20 % Emulsifier is mixed in suitable oil as per application need, however for best performance Naphthenic oil is preferable which would give better emulsion for longer duration.

APPLICATION: Recommended for Variety of Machining Operations for Ferrous and Non Ferrous Metals.

Following are the advantage for Soluble Cutting Oil made out of above EASTOCONKUT.

- Good Cooling and Lubricating Properties.
- Good Thermal Stability.
- No Foaming.
- Non Corrosive.
- Long Emulsion Life. Can with stand 500 ppm hard water.
- None Staining.
- Possessing Antibacterial Property.
- Non Harmful to Operator.
- Tool Life is extended.
- Power Consumption is reduced.
- Better Finish for the Machined Parts / Components.

PERFORMANCE LEVEL: Proprietary product

TYPICAL PROPERTIES

CHARACTERISTICS	EASTTO CONKUT EX
Specific Gravity	1.00 - 1.05
Flash Point	110
K. Viscosity at 100° c, cSt	30
Emulsion Test	Passes
PH of 5% Emulsion	9.0 - 9.50

PACKING: 210 Litres Drums



Eastern Petroleum Private Limited

Regd. Off.:

Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990
Email: office@easternpetroleum.in, office@eastto.in,
Web: www.easternpetroleum.in, www.eastto.in



Eastern Petroleum Private Limited

an ISO 9001-2008 certified company



Eastto
Conkut EX